

X102FD

2x 10" HIGH PERFORMANCE TWO-WAY
ACTIVE FULL-RANGE SPEAKER SYSTEM

XCELLENCE



Dante™
Act+ve

The X102FD has been developed as a powerful and compact, more efficient point source alternative to line arrays in medium size application environments. The design objective was to optimally achieve the highest quality sound at the highest possible output levels from the most compact enclosure possible.

KEY FEATURES

TRANSDUCERS TECHNOLOGY

Two-way full range active speaker system composed by two direct radiating 2.5-inch voice coil, neodymium magnet 10" loudspeakers mounted on two mid frequency phase plugs and one 3-inch voice coil, titanium diaphragm, neodymium magnet compression driver loaded to a 80° x 60° rotatable horn.

AMPLIFICATION

3000 W 3rd generation Class D built-in amplifier controlled by a dedicated multichannel DSP.

90% efficiency amplifier SMPS (switching mode power supply), allowing maximum power delivery with minimum consumption in an extremely low-weight and reduced size.

Exclusive and unique Overvoltage Protection which continuously monitors line voltage and instantly disconnects the system if the line voltage exceeds the maximum permissible level.

Automatic low power consumption mode (EcoMode) available, when no signal present at the input.

Double PowerCon® (input & link).

DSP & CONTROL

ACTIVE+ DSP technology with all necessary signal processing (crossovers, EQ's, delay, limiters, gain control, mute) as well as several useful presets to adjust the X102FD to different requirements.

Advanced signal processing using F.I.R. (Finite Impulse Response) filters.

Rear connections and control panel with 3.5" TFT colour touch screen to display the different settings, presets, volume and adjustments done by the user.

Automatic input overload prevention circuit: prevents overloading the A/D converter input.

Double Ethernet connection with integrated Ethernet switch and Dante™ audio networking protocol that uses standard IP networks to receive high-quality, uncompressed audio with near-zero latency.

New DSPStudio® control software capable of adjusting and setting-up even the finest details and monitoring key parameters of the amplifier: input and output levels, limiter engagement, amplifier temperature and status, and network connection status.

DESIGN & ACCESSORIES

M8 rigging points for easy flying.

Ergonomic handles for an easy and comfortable transport.

2mm speaker grille with grey micro-foam cloth, exclusively designed with an optimum perforation gradient and attractive appearance.

Multilayer baltic birch plywood cabinet with Polyurea® coating, offering maximum reliability and strength for touring as well as for high demanding applications.

35mm diameter pole mount socket mounted on the bottom side for a standard tripod.

Protective rubber profiles.

X102FD

2x 10" HIGH PERFORMANCE TWO-WAY
ACTIVE FULL-RANGE SPEAKER SYSTEM

XCELLENCE



**DSP STUDIO CONTROL
APP FOR WINDOWS**



**EXCLUSIVE HIGH
PERFORMANCE
ROTATABLE HORN**



**EXCLUSIVE LOW
FREQUENCY PHASE
PLUG**



**LIGHT NEODYMIUM
COMPONENTS**



**> 250 V
OVERVOLTAGE
PROTECTION**



**MULTIPLE PRESETS
AVAILABLE**



**HIGH RESISTANT
POLYUREA® PAINT**



**ACCESSORIES FOR
EASY INSTALLATIONS**

TECHNICAL FEATURES

Amplifier (program power)	2500 W (LF) + 500 W (HF) Class D Bi-amplified
Input sensitivity	8 dBu – 1.94 V
Input Impedance	20 kΩ Balanced
Maximum input level	20 dBu - 7.75 V
Mains	Universal Switch Mode Power Supply 85-265 V / 45-65 Hz
Average current draw	3.3 A (Heavy duty musical program)
SPL (1 m)	136 dB continuous musical program, 139 dB peak
Built-in DSP	64-bit processing unit. Includes factory presets
AD/DA converters	24 bit – 48 kHz
Standby mode consumption	< 5 W
Adjustable delay line	294 ms / 100 m
Crossover frequency	850 Hz
Frequency response (-10 dB)	58 Hz – 19 kHz
Components	LF 2x 10" neodymium woofers (2.5" voice coil) HF 1x 3" titanium diaphragm, neodymium magnet compression driver
Directivity (HxV)	80° x 60° / 60° x 80° (rotated horn)
Directivity factor (Q)	12.6
Directivity index (DI)	11 dB
Weight	32 Kg
Dimensions (HxWxD)	704 x 330 x 460 mm
Finish	Multilayer baltic birch plywood with high resistant black Polyurea® coating and protective rubber profiles
Grille	2 mm steel with grey micro-foam cloth
Rigging	M8 points
Connectors	1x XLR input / 1x XLR link / 1x AC PowerCon® input / 1x AC PowerCon® link / 1 x EtherCon® RJ45 input / 1 x EtherCon® RJ45 link



TOP VIEW



BOTTOM VIEW



FRONTAL VIEW
WITHOUT GRILLE



SIDE VIEW



REAR VIEW


X102FD

2x 10" HIGH PERFORMANCE TWO-WAY
ACTIVE FULL-RANGE SPEAKER SYSTEM


XCELLENCE




FREQUENCY RESPONSE 1w/1m (FLAT PRESET)

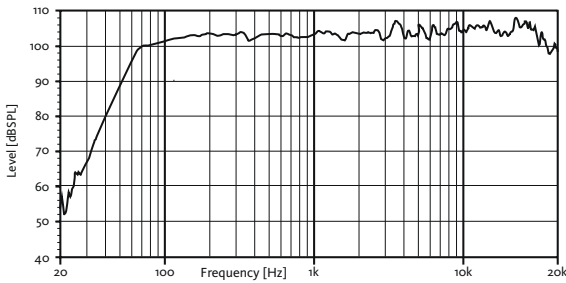


HORIZONTAL COVERAGE

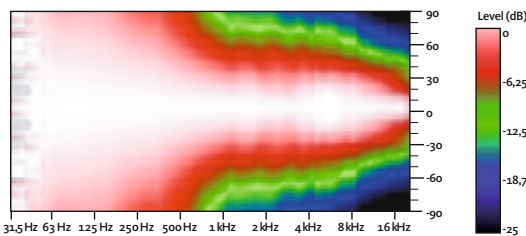

VERTICAL COVERAGE

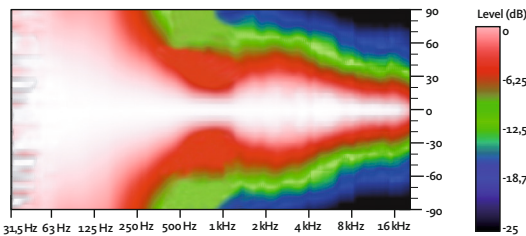


HORIZONTAL & VERTICAL BEAMWIDTH (-6dB point)

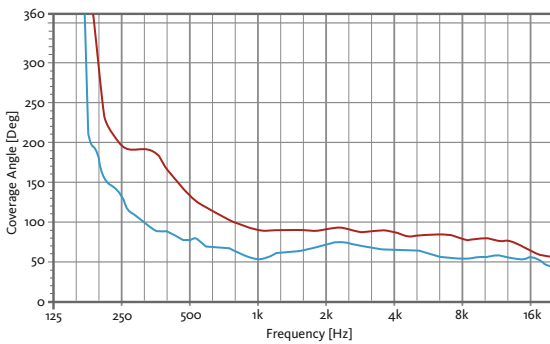


HORIZONTAL VERTICAL

DIRECTIVITY INDEX (Di)

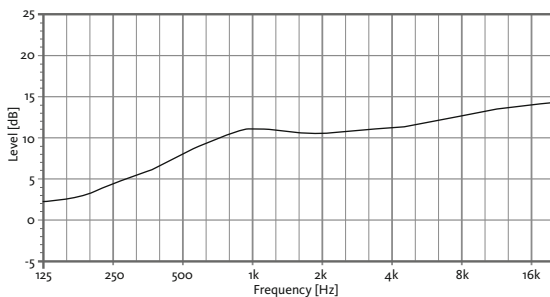

CAD DRAWING SCHEME

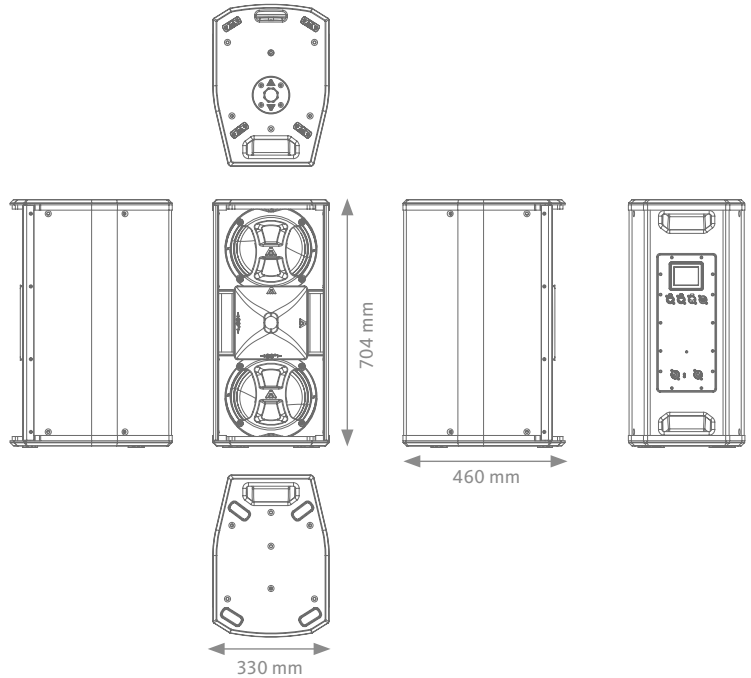

REAR CONTROL PANEL TOUCHSCREEN



DSP STUDIO 3 CONTROL SOFTWARE

The application utilises a bespoke control protocol that supports that supports Ethernet and WI-FI connectivity connectivity (control over IP).

It allows to address the ethernet-enabled amp and DSP modules in the Xcellence series cabinets, affording the user visual feedback on amplifier status and the ability to edit processor values from any spot in the venue.



X102FD

2x 10" HIGH PERFORMANCE TWO-WAY
ACTIVE FULL-RANGE SPEAKER SYSTEM

XCELLENCE



ACCESSORIES

FLIGHT CASE FC-X102FD
for two units of X102FD



FLYING BAR RB-L



FLYING BAR WITH HOOK RB-L/GT



FLYING BAR HR-L102 for two cabinets



TELESCOPIC DISTANCE ROD SP-CRTL

ø: 35 mm
Length: 55 cm ~ 90 cm
Thread: M20



SAFETY SLING SC-15



PROTECTIVE COVER NC-X102FD
for one unit of X102FD



M8 RIGGING EYEBOLT ACR-M8




SMART ROTATABLE HORN

A truly multifunctional system, the X102FD is enabled for use in both vertical and horizontal planes, with the rotatable horn being a simple 'pull, rotate and return' solution; no tools required.


VERTICAL PLANE

80°(H) x 60°(V) to 60°(H) x 80°(V)

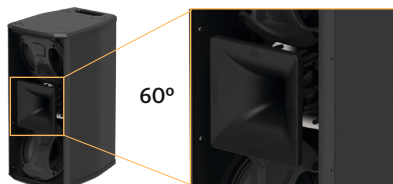


Horn dispersion
80°(H) x 60°(V)

80°

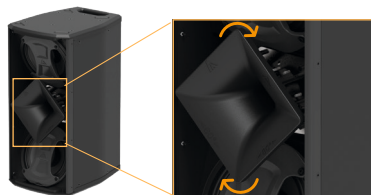

Smart rotatable horn.

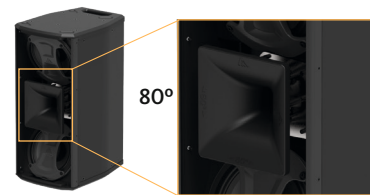


Horn dispersion
60°(H) x 80°(V)

60°


HORIZONTAL PLANE

80°(H) x 60°(V) to 60°(H) x 80°(V)

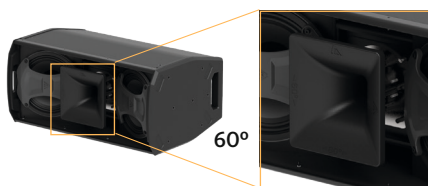


Horn dispersion
80°(H) x 60°(V)

80°

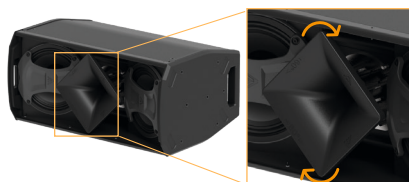

Smart rotatable horn.

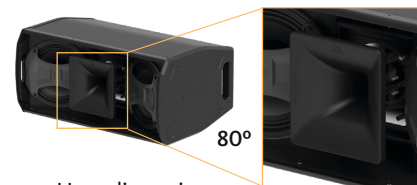

Horn dispersion
60°(H) x 80°(V)

60°