

JOKER

JK12MA

12" COAXIAL
LOW-PROFILE ACTIVE
STAGE MONITOR

Joker



JK12MA

Your definitive stage tool!
Superb musical and vocal performance with an awesome low-end.
Low profile and lightweight in a compact size.

JK12MA

12" COAXIAL
LOW-PROFILE ACTIVE
STAGE MONITOR



Coaxial speaker




Multiple PRESETS available


TECHNICAL FEATURES

Amplifier (program power)	600 + 100 W Class D Bi-amplified
Input sensitivity	8 dBu – 1.94 V
Input Impedance	20 kΩ Balanced
Maximum input level	20 dBu
Mains	Universal Switching Power Supply 85-265 V/45-65 Hz
Average current draw	0.7 A (Heavy duty musical program)
SPL (1 m)	126 dB continuous, 129 dB peak
Built-in DSP	48 bit
Presets	MONITOR / FULL RANGE / NEARFIELD / SPEECH / XOVER / PRESENCE / PRESENCE +
AD/DA converters	24 bit – 48 kHz
Standby mode consumption	< 5 W
Adjustable Delay line	118 ms / 40 m
Frequency response (-10 dB)	48 Hz – 20 kHz
Components	Coaxial transducer LF-MF HF 12" Coaxial woofer (3" voice coil) 3" Titanium diaphragm driver
Directivity (HxV)	60° x 40°
Dimensions (HxWxD)	374 x 600 x 565 mm
Weight	24.4 kg
Finish	Multilayer plywood 1.5 mm optimized steel grille with foam High resistant bi-component black Polyurea® coating


FREQUENCY RESPONSE 1W/1m (FULL RANGE PRESET)

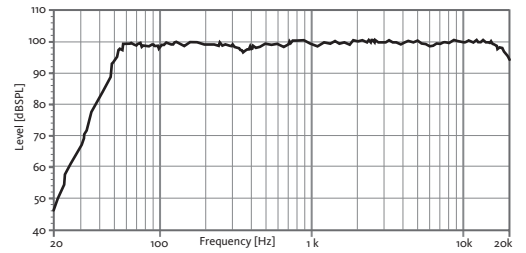

HORIZONTAL COVERAGE

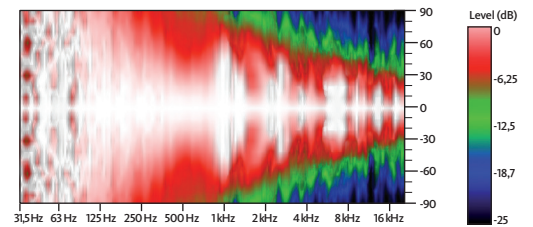

VERTICAL COVERAGE

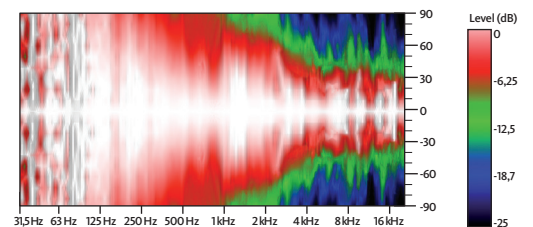


BOTTOM VIEW




LEFT VIEW




ACCESSORIES




FC-JK12MA



UB-L



SP/CRTL



SC-15



ACR-M8